

Key Features & Benefits:

- Double Ended or Single Ended Wiring
- Glass Construction with Shatterproof Coating
- Integral Driver (Isolated)



Project: _____ Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 12 Watts
 Selectable Kelvin: 4000K–5000K–6500K
 Lumens: Up to 1,800 Lumens
 Efficacy: Up to 144 lm/W
 Color Rendering Index (CRI): >80
 Input Voltage: 120–277 VAC
 Material: Glass with Shatterproof Coating
 Power Factor: >0.9
 Base Type: G13
 Operating Temperature: -4°F to 113°F
 NSF/ANSI 2: Food Equipment Standard by ETL
 Rated Life (hrs): 50,000 Hours
 Measurement (ØxL): Ø1.14" x 47.22"
 Weight (lbs): 0.62 Pounds

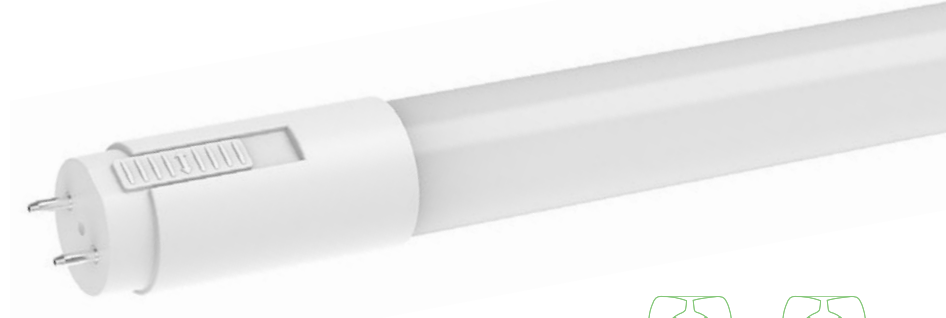


3 CCT
SELECTABLE
KELVIN

Ordering Guide:


| ESL | T8 | TYPE | WATTAGE | LENS | GENERATION | SELECTABLE KELVIN |
|-----|--------------|---------------------|----------------|-------------|--------------------|--------------------------|
| ESL | T8 | B4 | 12W | F | 1 | 4065 |
| | (T8) T8 Tube | (B4) Type B, 4 Foot | (12W) 12 Watts | (F) Frosted | (1) 1st Generation | (4065) 4000K–5000K–6500K |

T8B Wire Diagrams (Type B):

Before Upgrade:

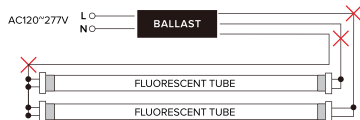

After Upgrade:

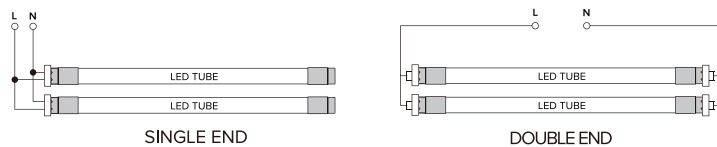

Catalog Data:

SELECTABLE

| ITEM# | WATTAGE | SELECTABLE KELVIN | MAX LUMEN OUTPUT | MAX EFFICACY (lm/W) | INPUT VOLTAGE | BASE | DLC QPL CODE |
|--------------------------|---------|-------------------------------|------------------|---------------------|---------------|------|--------------|
| 2 FOOT | | | | | | | |
| ESL-T8B2-7W-F13550 | 7W | 3500K–4000K–5000K | 950 | 136 | 120–277 VAC | G13 | S-V1X154 |
| ESL-T8B2-7W-F13065 | 7W | 3000K–3500K–4000K–5000K–6500K | 1,000 | 143 | 120–277 VAC | G13 | PENDING |
| 3 FOOT | | | | | | | |
| ESL-T8B3-12W-F13065 | 12W | 3000K–3500K–4000K–5000K–6500K | 1,550 | 129 | 120–277 VAC | G13 | PENDING |
| 4 FOOT | | | | | | | |
| ESL-T8B4-12W-F14065 | 12W | 4000K–5000K–6500K | 1,800 | 144 | 120–277 VAC | G13 | S-K0TH7Y |
| ESL-T8B4-12W-F13065 | 12W | 3000K–3500K–4000K–5000K–6500K | 1,800 | 144 | 120–277 VAC | G13 | PENDING |
| ESL-T8B4-18W-F13065 | 18W | 3000K–3500K–4000K–5000K–6500K | 2,700 | 146 | 120–277 VAC | G13 | PENDING |
| 8 FOOT | | | | | | | |
| ESL-T8B8-38W-F14065 | 38W | 4000K–5000K–6500K | 5,400 | 142 | 120–277 VAC | Fa8 | S-N5AG7W |
| ESL-T8B8-38W-F14065-R17D | 38W | 4000K–5000K–6500K | 5,500 | 145 | 120–277 VAC | R17D | N/A |


NON-SELECTABLE

| ITEM# | WATTAGE | KELVIN | MAX LUMEN OUTPUT | MAX EFFICACY (lm/W) | INPUT VOLTAGE | BASE | DLC QPL CODE |
|-------------------|---------|--------|------------------|---------------------|---------------|------|--------------|
| 4 FOOT | | | | | | | |
| ESL-T8B4-12W-F135 | 12W | 3500K | 1,750 | 146 | 120–277 VAC | G13 | PEADIVZF |
| ESL-T8B4-12W-F140 | 12W | 4000K | 1,800 | 150 | 120–277 VAC | G13 | PDU0TR9C |
| ESL-T8B4-12W-F150 | 12W | 5000K | 1,850 | 154 | 120–277 VAC | G13 | PVKSR43Y |
| ESL-T8B4-18W-F135 | 18W | 3500K | 2,650 | 147 | 120–277 VAC | G13 | PPSO08C3 |
| ESL-T8B4-18W-F140 | 18W | 4000K | 2,700 | 150 | 120–277 VAC | G13 | PQ31Y27U |
| ESL-T8B4-18W-F150 | 18W | 5000K | 2,750 | 153 | 120–277 VAC | G13 | PODLR2RJ |
| 8 FOOT | | | | | | | |
| ESL-T8B8-38W-F150 | 38W | 5000K | 5,500 | 142 | 120–277 VAC | Fa8 | S-0G831U |

Dimensions:


2 FOOT SELECTABLE

Ø1.14" x 23.22"

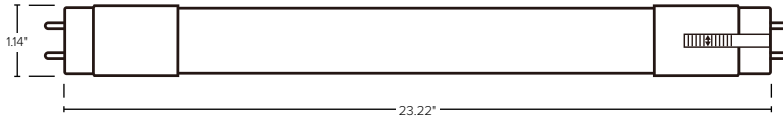


3 FOOT SELECTABLE

Ø1.14" x 35.22"

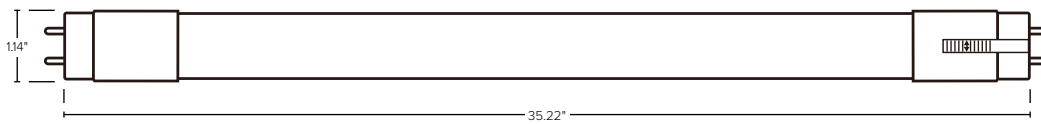


4 FOOT SELECTABLE AND NON-SELECTABLE

Ø1.14" x 47.22"

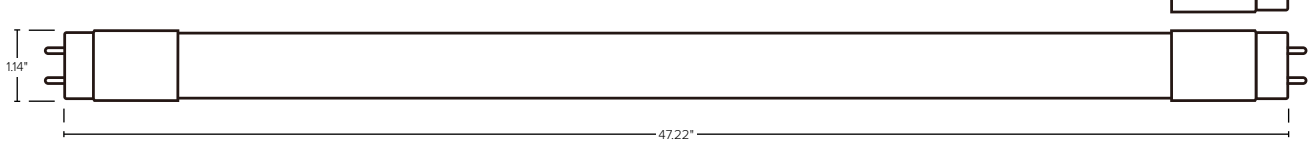


8 FOOT SELECTABLE AND NON-SELECTABLE

Ø1.14" x 93.90"

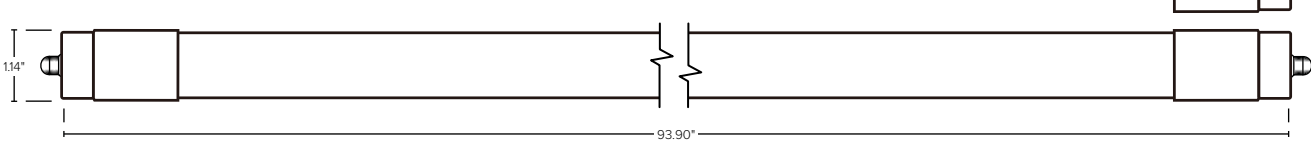

SOCKET TYPES




SELECTABLE KELVIN WITH G13 BASE:

- ESL-T8B2-7W-F13550
- ESL-T8B2-7W-F13065
- ESL-T8B3-12W-F13065
- ESL-T8B4-12W-F14065
- ESL-T8B4-12W-F13065
- ESL-T8B4-18W-F13065
- ESL-T8B8-38W-F14065




NON-SELECTABLE KELVIN WITH G13 BASE:

- ESL-T8B4-12W-F135
- ESL-T8B4-12W-F140
- ESL-T8B4-12W-F150
- ESL-T8B4-18W-F135
- ESL-T8B4-18W-F140
- ESL-T8B4-18W-F150
- ESL-T8B8-38W-F150



SELECTABLE KELVIN WITH Fa8 BASE:

- ESL-T8B8-38W-F14065



NON-SELECTABLE KELVIN WITH Fa8 BASE:

- ESL-T8B8-38W-F150



SELECTABLE KELVIN WITH R17D BASE:

- ESL-T8B8-38W-F14065-R17D