

Key Features & Benefits:

- Wet Location Approved
- Omnidirectional
- Rated for Fully Enclosed Fixtures



Project: _____


Date: _____

Catalog #: _____

Notes: _____

Technical Specifications:

- Power: 9 Watts
- Lumen Output: Up to 1,045 Lumens
- Efficacy (lm/W): Up to 127 Lumens per Watt
- Kelvin: 3000K, 4000K, 5000K
- CRI: >80
- Input Voltage: 120-277 VAC
- Life Span: 50,000 Hours
- Beam Angle: 300°
- Dimensions(ØxH): 2.36" x 4.8"
- Weight(lbs): 0.5 lbs
- Base Type: E26
- Operating Temperature: -4 ~ 149°F (-20 ~ 65°C)
- Power Factor: >0.95
- Total Harmonic Distortion (THD): < 20%

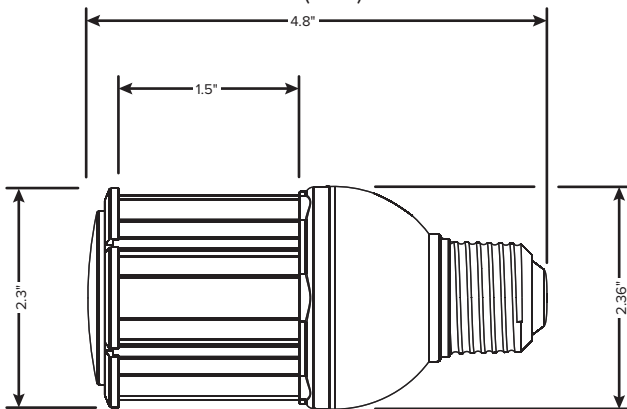

No Fans



No Noise



No Bugs

| ITEM# | WATTS | LUMEN OUTPUT | EFFICACY (lm/W) | KELVIN |
|----------------|-------|--------------|-----------------|--------|
| ESL-CL-9W-230S | 9W | 980 | 116 | 3000K |
| ESL-CL-9W-240S | 9W | 1,025 | 125 | 4000K |
| ESL-CL-9W-250S | 9W | 1,045 | 127 | 5000K |

*2700K and 5700K available upon request

Ordering Guide:

Example Part Number: **ESL-CL-9W-230S**

| | | | | |
|------------|-----------|--------------|--------------------|--|
| ESL | CL | 9W | 2 | S |
| ESL | TYPE | WATTS | GENERATION | KELVIN |
| | CL | 9W (9 Watts) | 2 (2nd Generation) | 30 (3000K) 40 (4000K) 50 (5000K) |
| | | | | S (E26) |

Additional Options:

| |
|----------|
| |
| OPTIONS |

ESL-SP-277 (Surge Protector up to 277 VAC)