

Key Features & Benefits:

- Dusk to Dawn
- IP65 - Weather Resistant
- 120-277 VAC, HV 347-528 VAC

Project: _____


Date: _____

Catalog #: _____

Notes: _____

Technical Specifications:

Working Voltage: 100-277 VAC, HV - 347-528 VAC
 Rated Loading: 1000W Tungsten, 1800VA Ballast, 5A e-Ballast
 Power Consumption: 1.2W Average
 On/Off Level: 50 Lux
 Surge Protection: 640 Joule / 40000 Amp
 Time Delay: 10 Seconds
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)
 Related Humidity: 99%
 Dimensions (ØxH): 3.3" x 3.38"
 Weight (lbs): 0.44 lbs
 *Comes factory installed on fixture

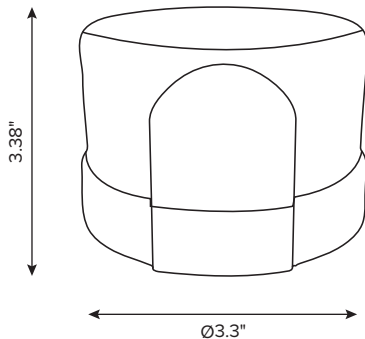

ITEM#	DESCRIPTION
ESL-PCDD	Dusk to dawn photocell offers a controlled ramp up period to full brightness at dusk while slowly dimming at dawn. A 5-Pin or 7-Pin receptacle is needed to work with the ESL-PC-DD

Wiring Diagram:

ESL-RPC5 or ESL-RPC7 is required to function properly. Gray and Violet leads must be connected to a 0-10V driver.

