

### Key Features & Benefits:

- Standard On/Off Control
- IP65 - Weather Resistant
- Built-In Surge Arrester
- 120-277 VAC, HV 347-528 VAC

### Technical Specifications:


Working Voltage: 120-277 VAC, HV - 347-528 VAC  
 Rated Loading: 1000W Tungsten, 1800VA Ballast  
 Power Consumption: 0.5W (120-277V), 0.9W (347-528V)  
 On/Off Level: 16 Lux On / 24 Lux Off  
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)  
 Related Humidity: 99%  
 Dimensions (ØxH): 3.3" x 2.6"  
 Weight (lbs): 0.24 lbs  
 \*Comes factory installed on fixture

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

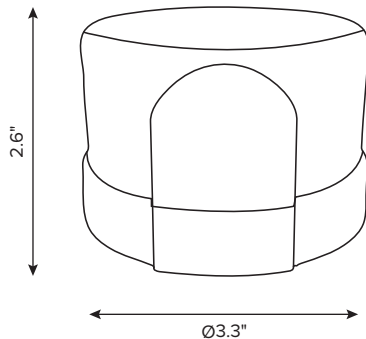

ITEM#	DESCRIPTION
ESL-PCOF	Standard on/off photocell that has been frequently used in the market with antiquated technologies.

### Wiring Diagram:

Install the ESL-PCOF with the photocell facing North (as indicated on top of housing).  
 Adjust position if necessary in field.

