


Key Features & Benefits:

- Double Ended or Single Ended Wiring
- Glass Construction with Shatterproof Coating
- Integral Driver (Isolated)

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Product Specifications:

Wattage: 25 Watts
 Selectable Kelvin: 4000K–5000K–6500K
 Lumen Output: Up to 3,500 Lumens
 Efficacy: Up to 140 lm/W
 Color Rendering Index (CRI): >80
 Input Voltage: 120–277 VAC
 Material: Glass with Shatterproof Coating
 Power Factor: >0.9
 Base Type: G5
 Operating Temperature: -4°F to 113°F
 NSF/ANSI 2: Food Equipment Standard by ETL
 Rated Life (hrs): 50,000 Hours
 Measurement (ØxL): Ø0.83" x 45.23"
 Weight (lbs): 0.40 Pounds



Ordering Guide:


ESL	T5	TYPE	WATTAGE	LENS	GENERATION	SELECTABLE KELVIN
ESL	T5 <small>(T5) T5 Tube</small>	HOB4 <small>(HOB4) High Output Type B, 4 Foot</small>	25W <small>(25W) 25 Watts</small>	F <small>(F) Frosted</small>	1 <small>(1) 1st Generation</small>	4065 <small>(4065) 4000K–5000K–6500K</small>

Catalog Data:


ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE
ESL-T5HOB4-25W-F14065	25W	4000K–5000K–6500K	3,500	140	120–277 VAC

T5HOB Wire Diagrams (Type B):

Before Upgrade:

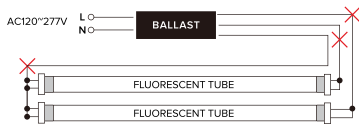

After Upgrade:

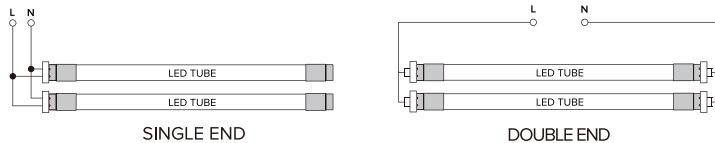

Dimensions:

4 Foot
 ESL-T5HOB4-25W-F14065
 Ø0.83" x 45.23"

