

Key Features & Benefits:

- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- > 220° Beam Spread
- Integral Driver (Isolated)




Technical Specifications:

Input Voltage: 120-277 VAC
 Lumen Output: Up to 1,922 Lumens
 Efficacy (lm/W): Up to 155 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >80
 Material: Glass with PET Coating
 Power Factor: >0.9
 Rated Life (hrs): 50,000 Hours
 Base Type: G13
 Operating Temperature: -4°F - 113°F
 Tube Dimensions (ØxL): 1" x 47.75"
 Tube Weight (lbs): 0.4 Pounds

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____



ITEM#	KELVIN	DLC QPL CODE
ESL-T8-GDT-12W-F130	3000K	PV2LT7UO
ESL-T8-GDT-12W-F135	3500K	PYCJ0NMV
ESL-T8-GDT-12W-F140	4000K	PD7DYQ7N
ESL-T8-GDT-12W-F150	5000K	P8871LQE

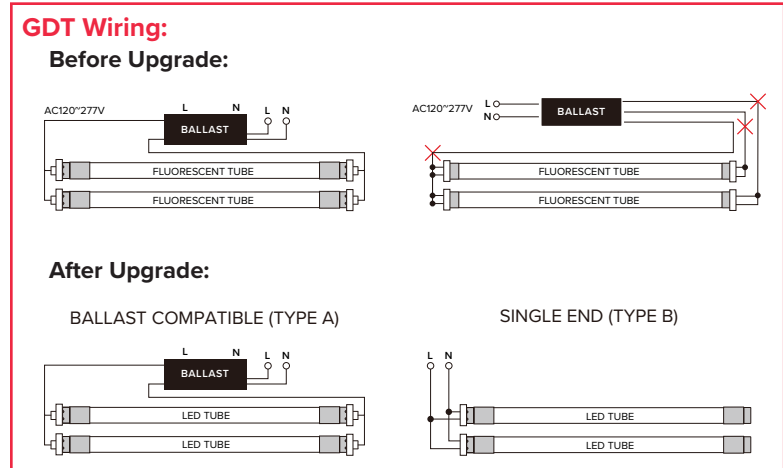

ITEM#	KELVIN	LINE VOLTAGE			0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
		WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)
ESL-T8-GDT-12W-F130	3000K	12.4W	1,860	150	12.5W	1,838	147	15.7W	1,884	120	16W	1,833	115
ESL-T8-GDT-12W-F135	3500K	12.4W	1,885	152	12.5W	1,838	147	15.7W	1,884	120	16W	1,833	115
ESL-T8-GDT-12W-F140	4000K	12.4W	1,897	153	12.5W	1,848	148	15.7W	1,900	121	16W	1,843	116
ESL-T8-GDT-12W-F150	5000K	12.4W	1,922	155	12.5W	1,854	148	15.7W	1,915	122	16W	1,853	117

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

Ordering Guide:

Example Part Number: **ESL-T8-GDT-12W-135**

ESL	-	T8	-	GDT	-	12W	-	F	-	1	-	
ESL		T8		TYPE		WATTS		LENS		GENERATION		KELVIN
		T8 Tube		Glass Dual-Mode Tube		12W (12 Watts)		F (Frosted)		1 (1st Generation)		30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)