

Key Features & Benefits:

- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- > 220° Beam Spread
- Integral Driver (Isolated)



Technical Specifications:

Input Voltage: 120-277 VAC
 Lumen Output: Up to 2,188 Lumens
 Efficacy (lm/W): Up to 125 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >80
 Material: Glass with PET Coating
 Power Factor: >0.9
 Rated Life (hrs): 50,000 Hours
 Base Type: G13
 Operating Temperature: -4°F - 113°F
 Tube Dimensions (ØxL): 1" x 47.75"
 Tube Weight (lbs): 0.4 Pounds





Project: _____ Date: _____
 Catalog #: _____
 Notes: _____





ITEM#	KELVIN	DLC QPL CODE
ESL-T8-GDT-15W-F130	3000K	P6SI7RJ5
ESL-T8-GDT-15W-F135	3500K	PYPKK78I
ESL-T8-GDT-15W-F140	4000K	PAVEWD6P
ESL-T8-GDT-15W-F150	5000K	P7VLCKLN

GDT Wiring:

Before Upgrade:



After Upgrade:

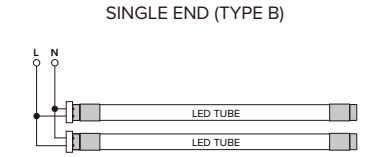

ITEM#	KELVIN	LINE VOLTAGE			0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
		WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)
ESL-T8-GDT-15W-F130	3000K	14.6W	2,088	143	17.5W	2,088	143	17.6W	2,130	121	19.1W	2,041	107
ESL-T8-GDT-15W-F135	3500K	14.6W	2,102	144	17.5W	2,102	144	17.5W	2,118	121	19.1W	2,041	107
ESL-T8-GDT-15W-F140	4000K	14.6W	2,132	146	18.3W	2,132	146	17.5W	2,135	122	19.9W	2,091	105
ESL-T8-GDT-15W-F150	5000K	14.6W	2,161	148	17.8W	2,161	148	17.5W	2,188	125	19.4W	2,059	106

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

Ordering Guide:

Example Part Number: **ESL-T8-GDT-15W-135**

ESL	-	T8	-	GDT	-	15W	-	F	-	1	-	35
ESL		T8		TYPE		WATTS		LENS		GENERATION		KELVIN
		T8 Tube		Glass Dual-Mode Tube		15W (15 Watts)		F (Frosted)		1 (1st Generation)		30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)