

### Key Features & Benefits:

- Up to 161 Lumens per Watt
- Glass Construction with Shatterproof Coating
- > 220° Beam Spread
- Double Ended or Single Ended Wiring
- Integral Driver (Isolated)



Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_




### Technical Specifications:


Power: 10 Watts  
 Input Voltage: 120-277 VAC  
 Lumen Output: Up to 1,653 Lumens  
 Efficacy (lm/W): Up to 161 Lumens per Watt  
 Kelvin: 3000K, 3500K, 4000K, 5000K  
 Color Rendering Index (CRI): >80  
 Material: Glass with PET Coating  
 Power Factor: >0.9  
 Rated Life (hrs): 50,000 Hours  
 Base Type: G13  
 Operating Temperature: -4°F ~ 113°F (-20°C ~ 45°C)  
 Tube Dimensions (ØxL): 1" x 47.75"  
 Tube Weight (lbs): 0.4 Pounds

### GLV Wire Diagrams (Type B):

#### Before Upgrade:

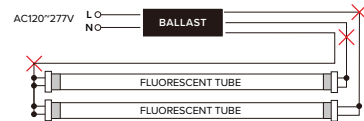

#### After Upgrade:

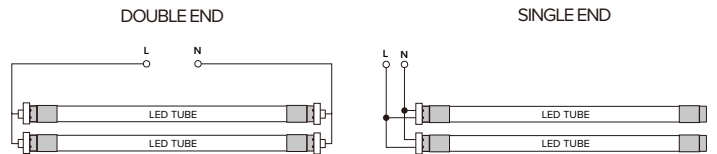

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
ESL-T8-GLV-10W-F130	10W	1,653	157	3000K	PQHFNLCB
ESL-T8-GLV-10W-F135	10W	1,624	159	3500K	PUNOS2GN
ESL-T8-GLV-10W-F140	10W	1,626	160	4000K	PS2M28PN
ESL-T8-GLV-10W-F150	10W	1,631	161	5000K	PKJASPTI

### Ordering Guide:

Example Part Number: **ESL-T8-GLV-10W-F135**

<b>ESL</b>	-	<b>T8</b>	-	<b>GLV</b>	-	<b>10W</b>	-	<b>F</b>	<b>1</b>	
ESL		T8		TYPE		WATTS		LENS	GENERATION	KELVIN
		T8 Tube		Glass Line Voltage (4ft)		10W (10 Watts)		F (Frosted)	1 (1st Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)