


Date:

Proiect:

Catalog #:

Notes:

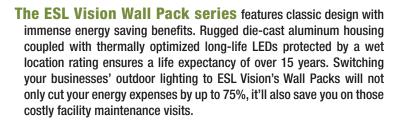

Key Features & Benefits

- Rugged die-cast aluminum housing:
 - Dark bronze polyester powder coat

LED Wall Pack - 70W

- · Optical grade polycarbonate lens:
 - UV stabilized
 - Molded prismatic for optimal uniformity
 - Impact resistant
- Continuous gasket for weather-tight seal
- LEDs mounted to and protected by aluminum housing with easy driver access hinged door
- **Environmentally friendly:**
 - No mercury
 - No hazardous substances
 - Super low energy consumption

 Suitable fo 	r wet locations
---------------------------------	-----------------

- (3) 3/4" Threaded knockouts
 - (1) On bottom
 - (1) On either side
- 10 Year limited warranty
- Mounting options:
 - Direct to electrical box
 - Flush wall mount
- Comes standard with full cutoff **IESNA** compliant reflector



Wall Pack



Integrated Design





ESL Vision Part#	DLC Listed QPL Code
ESL-WP-70W-140	PDVCSJH6
ESL-WP-70W-150	PAZYCMPM







Technical Data


Driver Specifications

Input Power: 70 Watts Input Voltage: 120-277 VAC

Input Current @ 120V: 0.583 Amps Input Current @ 277V: 0.253 Amps **Total Harmonic Distortion (THD):**

THD @ 120V: 5% THD @ 277V: 14%

Wall Pack Dimensions





Light Specifications

Lumen Output: Up to 6,000 Lumens Efficacy (Im/W): Up to 86 Lumens

Correlated Color Temperature (CCT): 4000K, 5000K

Color Rendering Index (CRI): >80

Beam Angle: 83-110° Lens Type: Polycabonate Photocell Compatable: YES L70 Lifetime: >50,000 Hours

Dimensions and Weights

Dimensions (LxWxD): 9.25x 14.21 x 7.4

Weight (lbs): 9.92

Wall Pack Ordering Guide

