

Key Features & Benefits:

- Fits most 4" J-boxes
- Surface Mount
- Damp Location Rated
- Triac Dimmable
- >90 CRI
- Easy Installation
- T24 Compliant

Project: _____

Date: _____

Catalog #: _____

Notes: _____



Product Specifications:

Power: 20 Watts
 Lumen Output: Up to 600 Lumens
 Efficacy (lm/W): Up to 60 Lumens per Watt
 Kelvin: 3000K
 Input Voltage: 120 VAC
 CRI: >90
 Rated Lifetime—L70 (hrs): 50,000
 Beam Angle: 100°
 Dimensions: Ø9.05" x 1"




Ordering Guide:

ESL	TYPE	SIZE	WATTS	GENERATION	KELVIN	FINISH
ESL	DDSK <small>(DDSK) Decorative Disk</small>	R9 <small>(R5) 5" Round (R7) 7" Round (R9) 9" Round</small>	20W <small>(10W) 10 Watts (15W) 15 Watts (20W) 20 Watts</small>	1 <small>(1) 1st Generation</small>	30 <small>(30) 3000K</small>	WH <small>(WH) White</small>

Catalog Data:



ITEM#	WATTAGE	KELVIN	LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	DIMENSIONS
ESL-DDSK-R5-10W-130-WH	10W	3000K	600	60	120 VAC	Ø 5.5" x 1.0"
ESL-DDSK-R7-15W-130-WH	15W	3000K	900	60	120 VAC	Ø 7.1" x 1.0"
ESL-DDSK-R7-15W-130-WH-EMG	15W	3000K	900	60	120 VAC	Ø 7.1" x 1.0"
ESL-DDSK-R9-20W-130-WH	20W	3000K	1200	60	120 VAC	Ø 9.05" x 1.0"
ESL-DDSK-R9-20W-130-WH-EMG	20W	3000K	1200	60	120 VAC	Ø 9.05" x 1.0"

Dimensions:

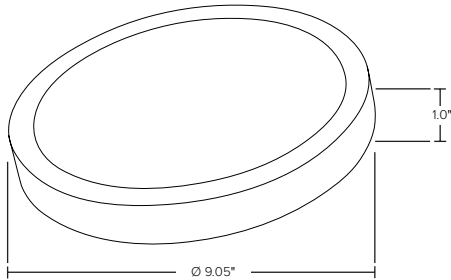

Wiring Guide:

3WEMG Wiring Diagram

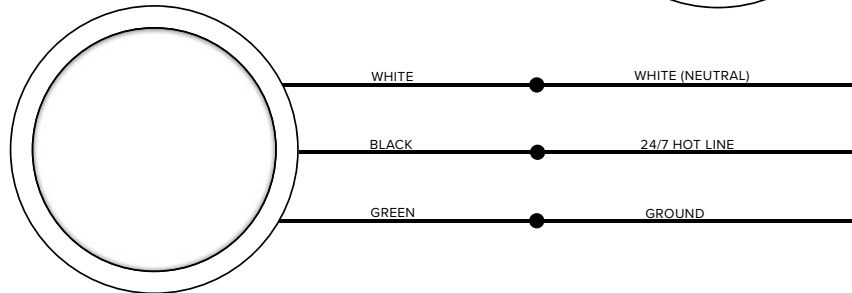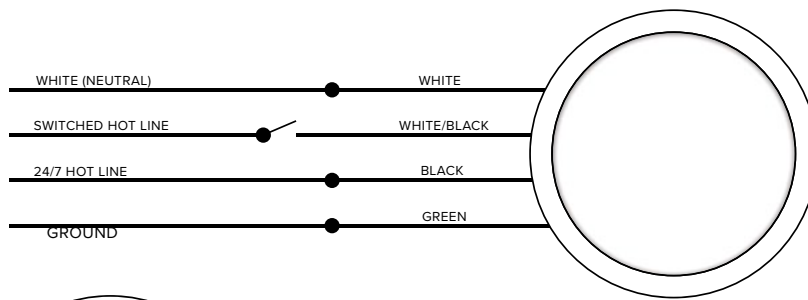

EMG Wiring Diagram (Standard)

Installation:

Accessories Below are Included

STEP 1: Attach mounting bracket to J-Box

STEP 2: Click DDSK into the mounting bracket

