


Key Features & Benefits:

- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- Wide Beam Angle
- Integral Driver (Isolated)



Key Features & Benefits:


- Input Voltage: 120–277 VAC
- Lumen Output: Up to 2,318 Lumens
- Efficacy (lm/W): Up to 162 Lumens per Watt
- Kelvin: 3000K, 3500K, 4000K, 5000K
- Color Rendering Index (CRI): >80
- Material: Glass
- Power Factor: >0.9
- Rated Life (hrs): 50,000 Hours
- Base Type: G13
- Operating Temperature: -4°F – 113°F
- Tube Dimensions (ØxL): 1" x 47.75"
- Tube Weight (lbs): 0.4 Pounds



Project: _____ Date: _____


Catalog #: _____

Notes: _____

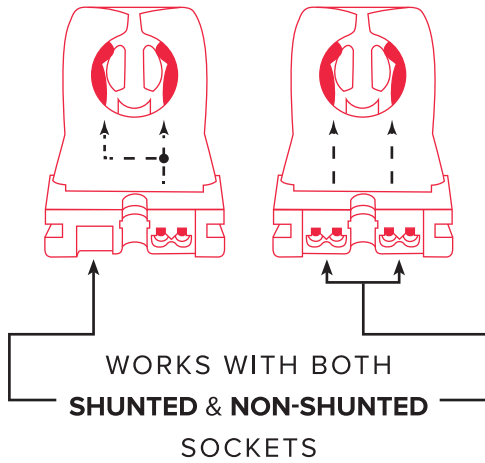


GDT Wiring:

Before Upgrade:



After Upgrade:

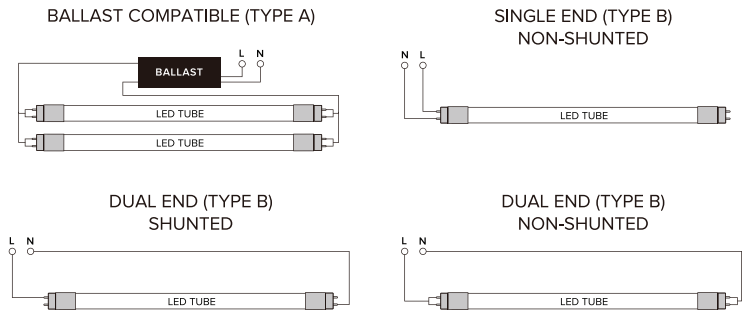

Ordering Guide:

ESL	T8	GDT	12W	F	3	
ESL	T8	TYPE	WATTS	LENS	GENERATION	KELVIN
	T8 Tube	Glass Dual-Mode Tube 4 Foot	12W (12 Watts)	F (Frosted)	3 (3rd Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

Catalog Data:

ITEM#	LINE VOLTAGE				0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
	KELVIN	WATTS	LUMEN OUTPUT	(LM/W)	WATTS	LUMEN OUTPUT	(LM/W)	WATTS	LUMEN OUTPUT	(LM/W)	WATTS	LUMEN OUTPUT	(LM/W)
ESL-T8-GDT-12W-F330	3000K	11.7W	1,790	153	9.9W	1,298	130	12.5W	1,661	132	18.6W	2,250	120
ESL-T8-GDT-12W-F335	3500K	11.7W	1,864	159	9.9W	1,311	131	12.5W	1,691	134	18.6W	2,272	121
ESL-T8-GDT-12W-F340	4000K	11.7W	1,890	162	9.9W	1,322	133	12.5W	1,711	136	18.W	2,311	122
ESL-T8-GDT-12W-F350	5000K	11.7W	1,902	162	9.9W	1,338	133	12.5W	1,697	135	18.8W	2,318	122

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

ITEM#	KELVIN	DLC QPL CODE
ESL-T8-GDT-12W-F330	3000K	PLNMCWK2LLNC
ESL-T8-GDT-12W-F335	3500K	PLBS9N2JXSQB
ESL-T8-GDT-12W-F340	4000K	PLG649GI4TJV
ESL-T8-GDT-12W-F350	5000K	PLYMNCEQVNTK

