

Key Features & Benefits:

- Kelvin Selectable
- Built-In Patent-Pending Replaceable Photocell
- 45° Beam Angle Lens
- Quick Mount Plate
- Customizable Light Settings
 - Uplight: 100% Wattage & Lumens
 - Downlight: 100% Wattage & Lumens
 - Bi-Directional: 50% Up and 50% Down


Product Specifications:

Wattage: 20W
 Selectable Kelvin: 3000K–4000K–5000K
 Lumens: Up to 2,640
 Efficacy: Up to 132 lm/W
 Input Voltage: 120–277 VAC
 Input Frequency: 50/60 Hz
 Operating Temperature: -40°F to 104°F (-40°C to 40°C)
 CRI: >80
 Warranty: 7 Years
 L70 Lifetime 90,000 Hours calculated per TM21
 Dimensions (ØxWxH): Ø4" x 12" x 6.07"
 Weight (lbs): 4.41

Project: _____ Date: _____

Catalog #: _____

Notes: _____

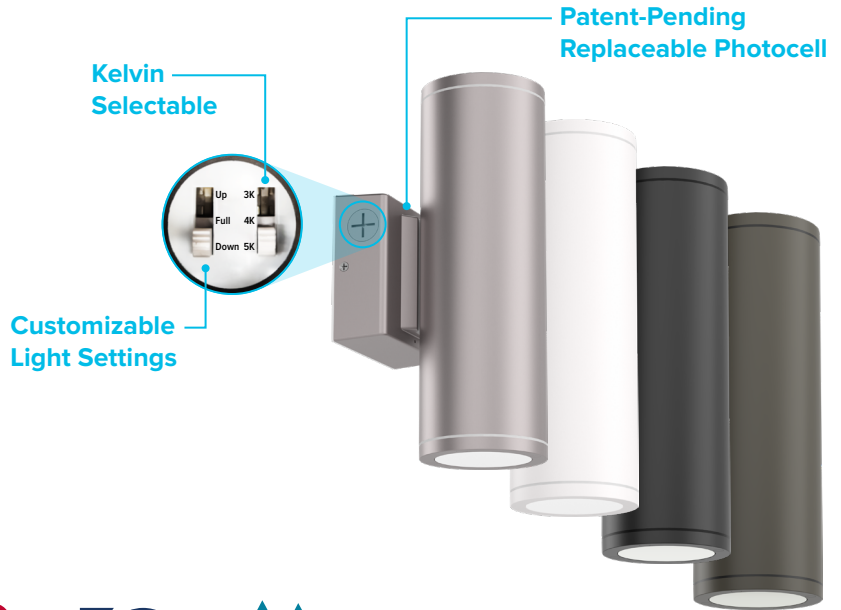

Ordering Guide:

ESL	-	TYPE	-	SELECTABLE WATTAGE	-	GENERATION	-	SELECTABLE KELVIN	-	FINISH	-	MOUNTING
ESL	-	CYL	-	20W	-	1	-	3050	-	ff	-	WM
		(CYL) Wall Mounted Cylinder		(20W) 20W		(1) 1st Generation		(3050) 3000K–4000K–5000K		(BK) Black (BZ) Bronze (MS) Matte Silver (WH) White		(WM) Wall Mount

Catalog Data:


ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS (ØxWxH)
ESL-CYL-15W-13050-ffWM	15W	3000K–4000K–5000K	1,667	113	Ø3" x 8" x 5.07"
ESL-CYL-20W-13050-ffWM	20W	3000K–4000K–5000K	2,640	132	Ø4" x 12" x 6.07"
ESL-CYL-35W-13050-ffWM	35W	3000K–4000K–5000K	5,075	145	Ø6" x 10" x 8.07"

Lumen Ambient Temperature (LAT) Multipliers:


AMBIENT	LUMEN MULTIPLIER
0 °C 32 °F	1.02
10 °C 50 °F	1.01
20 °C 68 °F	1.00
25 °C 77 °F	1.00
30 °C 86 °F	1.00
40 °C 104 °F	0.99
50 °C 122 °F	0.96

Dimensions:

Wall Mounted Cylinders – 3"
ESL-CYL-R3-15W-13050-ffWM

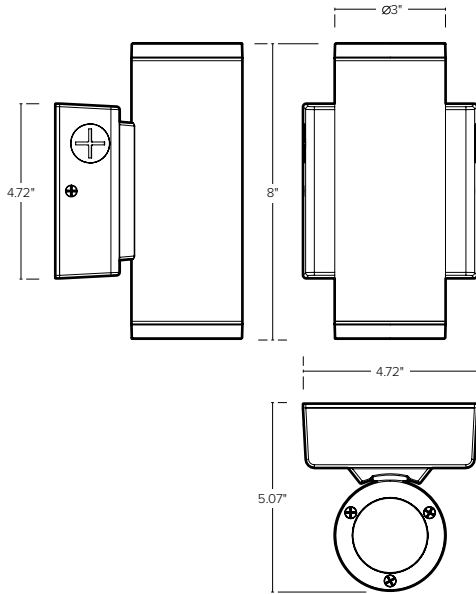

Wall Mounted Cylinders – 4"
ESL-CYL-R4-20W-13050-ffWM

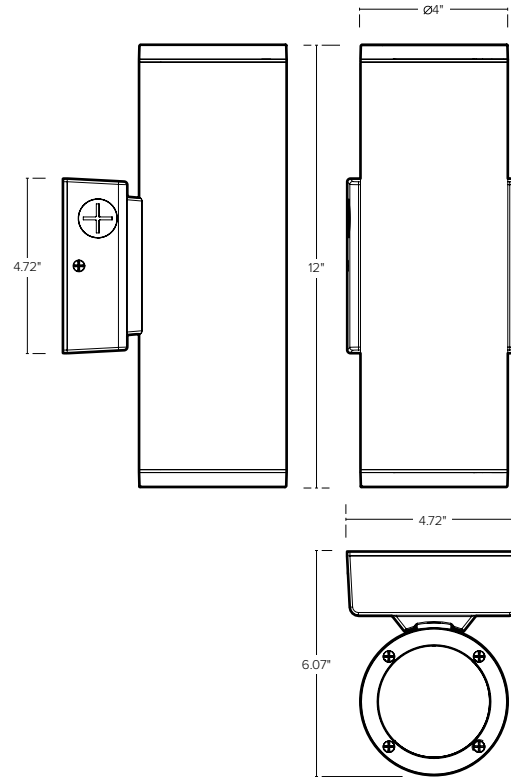

Wall Mounted Cylinders – 6"
ESL-CYL-R6-35W-13050-ffWM

