

### Product Features:

- Wattage and Kelvin Selectable
- Wet Location
- 0–10V Dimming
- Robust Housing with Stainless Steel Tamper-Resistant Hardware
- Included Surface Mount Kit

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Product Specifications:

Selectable Wattage: 30W–45W–60W  
 Selectable Kelvin: 3500K–4000K–5000K  
 Lumens: Up to 9,000  
 Efficacy: Up to 150 lm/W  
 Input Voltage Options: 120–277 VAC  
 Input Frequency: 50/60 Hz  
 Dimming: 0–10V Dimmable  
 CRI: >80  
 Beam Angle: 110°  
 Warranty: 5 Years  
 L70 Lifetime 100,000 hrs Calculated per TM21  
 Dimensions: 46.85" x 4.17" x 3.35"




### Ordering Guide:

ESL	FAMILY	SIZE	SELECTABLE WATTAGE	GENERATION	SELECTABLE KELVIN
ESL	VP (VP) Vapor Tight	4 (4) 4 Foot	3060W (3060W) 30W–45W–60W	2 (2) 2nd Generation	3550K (3550K) 3500K–4000K–5000K

### Dimensions:

#### ESL-VP4-3060W-23550

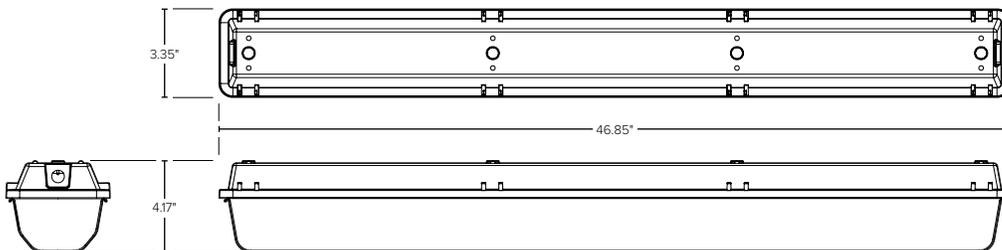

### Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT		LUMEN MULTIPLIER
0 °C	32 °F	1.02
10 °C	50 °F	1.01
20 °C	68 °F	1.00
25 °C	77 °F	1.00
30 °C	86 °F	1.00
40 °C	104 °F	0.99
50 °C	122 °F	0.96