

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Built In On/Off Photocell
- Stand-Alone 10kV Surge Protection
- Occupancy and Emergency Options
- Available in White* and Bronze Finishes

Product Specifications:


Selectable Wattage: 20W–40W–60W
 Lumen Output: Up to 8,560 Lumens
 Efficacy (lm/W): Up to 143 Lumens per Watt
 Kelvin: 3000K–4000K–5000K
 Protection: 10kV Stand-alone Surge Protection
 CRI: >80
 Dimming: 0–10V Dim to Off
 Power Frequency: 50/60Hz
 Power Factor: >0.9
 Operating Temperature: -40°F to 122°F
 (-40°C to 50°C)
 Input Voltage: 120–277VAC
 Beam Angle: Type 2
 Estimated L70 Lifetime 165,000 hrs Calculated
 Per TM21
 Warranty: 5 Year Warranty
 Dimensions: 10.65" x 9.36" x 6.85"
 Product Weight: 7.5 lbs
 Default Settings: 6W, 5000K
 Default Photocell: On

Project:

Date:

Catalog #:

Notes:



Ordering Guide:

ESL	-	TYPE	-	WATTAGE	-	GENERATION	-	KELVIN	-	FINISH	-	OPTIONS
ESL	-	FCWP	-	2060W	-	3	-	3050	-	BZ	-	
		(FCWP) Full Cut Off Wall Pack		(2060W) 20W–40W–60W (80120W) 80W–100W–120W		(3) 3rd Generation		(3050) 3000K–4000K–5000K		(BZ) Bronze (WH) White*		

FACTORY INSTALLED OPTIONS

EM9 Emergency Backup Battery Unit, Auto Test Function, 9 Watts Output, 90 Minutes Min, 120–277 VAC Input, 30–200 VDC Output, Closed Lead Wiring, UL Listed for Factory Installation

FIELD INSTALLED ACCESSORIES

ESL-ISS-MSEN-04-3P	MultiSense™ – Plug and Play 3 Wire Networked, Outdoor PIR Occupancy and Daylight Harvesting Sensor
ESL-OCCP-LV-01	PIR Occupancy
ESL-REM100	Microwave Occupancy Sensor

* White Finish Available Via Special Order

* Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).



Catalog Data:


ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	EFFICACY (lm/W)	DIMENSIONS	DLC QPL CODE
ESL-FCWP-2060W-33050-BZ	20W–40W–60W	3000K–4000K–5000K	8,560	143	10.65" x 9.36" x 6.85"	S-5XLZWZ
ESL-FCWP-2060W-33050-WH						
ESL-FCWP-80120W-33050-BZ	80W–100W–120W	3000K–4000K–5000K	16,965	141	13.28" x 9.36" x 8.11"	S-09MP4J
ESL-FCWP-80120W-33050-WH						

Electrical Load — Standard Voltage:


SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	SURGE PROTECTION	DIMMING
120 VAC	208 VAC	240 VAC	277 VAC								
20	0.17	0.10	0.08	0.07	120–277 VAC	50/60 Hz	>0.9	<20%	-40°F to 122°F (-40°C to 50°C)	6kV Driver	0–10V Dim to Off
40	0.33	0.19	0.17	0.14	120–277 VAC	50/60 Hz	>0.9	<20%	-40°F to 122°F (-40°C to 50°C)	6kV Driver	0–10V Dim to Off
60	0.50	0.29	0.25	0.22	120–277 VAC	50/60 Hz	>0.9	<20%	-40°F to 122°F (-40°C to 50°C)	6kV Driver	0–10V Dim to Off
80	0.67	0.38	0.33	0.29	120–277 VAC	50/60 Hz	>0.9	<20%	-40°F to 122°F (-40°C to 50°C)	6kV Driver	0–10V Dim to Off
100	0.83	0.48	0.42	0.36	120–277 VAC	50/60 Hz	>0.9	<20%	-40°F to 122°F (-40°C to 50°C)	6kV Driver	0–10V Dim to Off
120	1.00	0.58	0.50	0.43	120–277 VAC	50/60 Hz	>0.9	<20%	-40°F to 122°F (-40°C to 50°C)	6kV Driver	0–10V Dim to Off

Dimensions:

ESL-FCWP-2060W-33050-XX

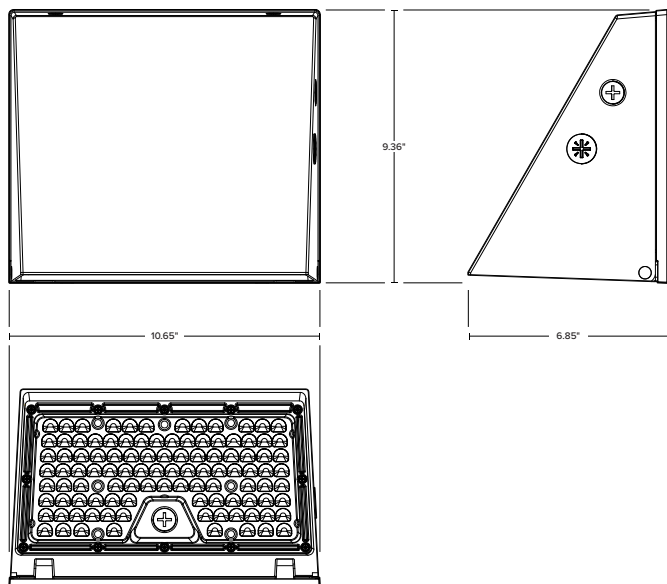



ESL-FCWP-80120W-33050-XX

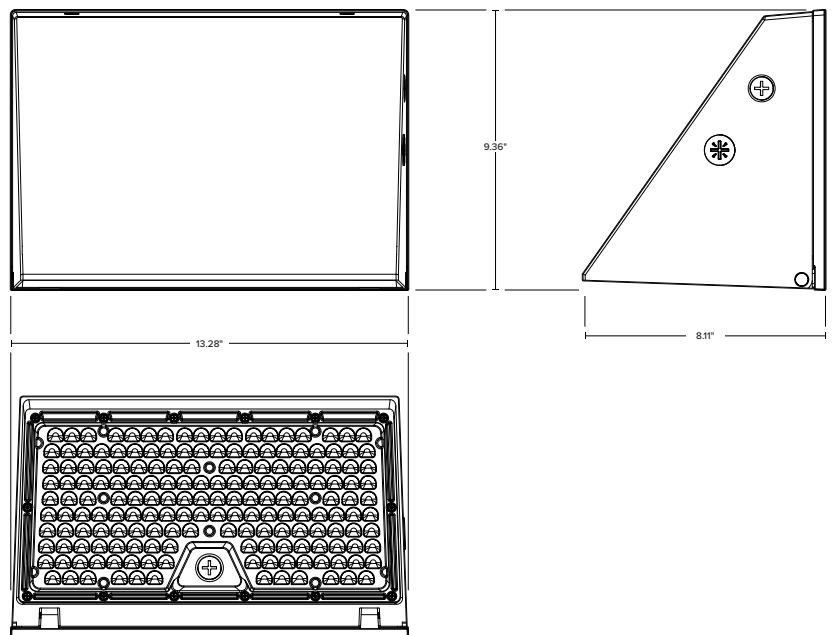

Mounting Dimensions:

ESL-FCWP-2060W-33050-XX

ESL-FCWP-80120W-33050-XX

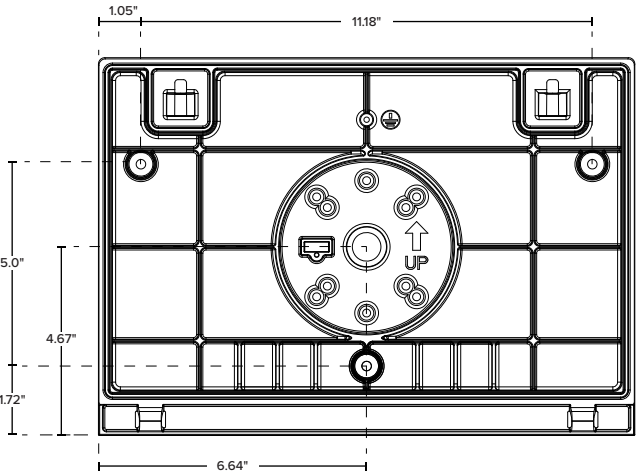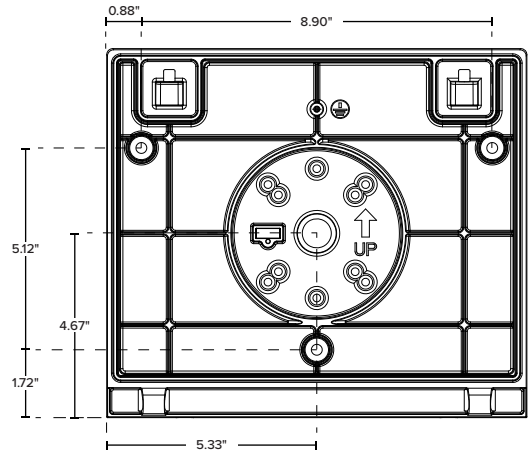

Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT		LUMEN MULTIPLIER
0 °C	32 °F	1.02
10 °C	50 °F	1.01
20 °C	68 °F	1.00
25 °C	77 °F	1.00
30 °C	86 °F	1.00
40 °C	104 °F	0.99
50 °C	122 °F	0.96

* Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2025 ESL Vision, LLC. All rights reserved. Rev: 09/24/25