



FLOOD LIGHT SERIES

ESL-FLD-3060W-23050-BZ

Page 1 of 4

Key Features & Benefits:

- Kelvin Selectable
- Wattage Selectable
- Beam Angle Selectable
- Multiple Mounting Options in the Box:
 - Knuckle Mount
 - Trunnion Mount
- Built In On/Off Photocell
- Durable Die-Cast Housing
- NEMA 4 & 5 Options

Product Specifications:

Selectable Wattage: 30W–40W–50W–60W
Selectable Kelvin: 3000K–4000K–5000K
Selectable Beam Angle: 55°–75°–90°
Lumens: Up to 9,000
Efficacy: Up to 150 lm/W
Input Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Dimming: 0–10V Dim to Off
Operating Temperature: -40°F to 122°F (-40°C to 50°C)
CRI: >80
Warranty: 5 Years
L70 Lifetime Calculated per TM21: 165,000 hrs
Dimensions (LxWxH): 7.8" x 7.2" x 3.4"
Weight (lbs): 12.57
Default Settings: 60W, 5000K & 90° Beam Angle
Default Photocell: On

Project:

Date:

Catalog #:

Notes:



Ordering Guide:

ESL	-	TYPE	-	SELECTABLE WATTAGE	-	GENERATION	-	SELECTABLE KELVIN	-	FINISH
ESL	-	FLD	-	XXXX	-	2	-	3050	-	BZ
		(FLD) Flood Light			(1020W) 10W–13W–17W–20W (3060W) 30W–40W–50W–60W (75150W) 75W–100W–125W–150W (200320W) 200W–240W–280W–320W (380500W) 380W–420W–450W–500W	(2) 2nd Gen			(3050) 3000K–4000K–5000K	(BZ) Bronze (WH) White*

* White Finish is only available for 1020W and 3060W models


Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	SELECTABLE BEAM ANGLE	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	FINISH	DIMENSIONS (LxWxH)	PHOTOCELL	DLC QPL CODE
ESL-FLD-1020W-23050-XX	10W-13W-17W-20W	3000K-4000K-5000K	55°-75°-90°	3,000	150	Bronze, White*	6.3" x 5.2" x 2.7"	Integrated On/Off	S-TNN3BJ
ESL-FLD-3060W-23050-XX	30W-40W-50W-60W			9,000	150	Bronze, White*	7.8" x 7.2" x 3.4"	Integrated On/Off	S-V4GN06
ESL-FLD-75150W-23050-BZ	75W-100W-125W-150W			22,500	150	Bronze	11.2" x 7.3" x 7.0"	Integrated On/Off	S-9WZW4H
ESL-FLD-200320W-23050-BZ	200W-240W-280W-320W			48,000	150	Bronze	16.63" x 10.3" x 8.5"	Twist Lock On/Off	S-QJTT5K
ESL-FLD-380500W-23050-BZ	380W-420W-450W-500W			75,000	150	Bronze	19.5" x 14.19" x 9.69"	Twist Lock On/Off	S-82Y0KQ


* White Finish is only available for 1020W and 3060W models

Dimensions:


ESL-FLD-1020W-23050-XX

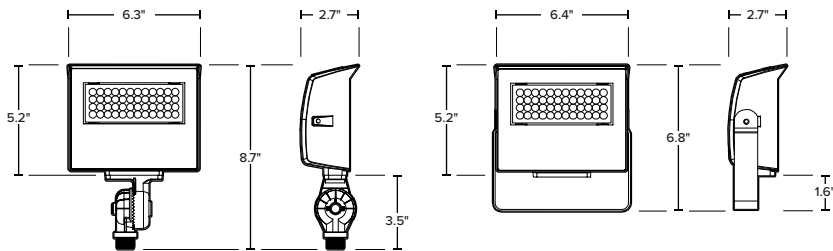

ESL-FLD-3060W-23050-XX

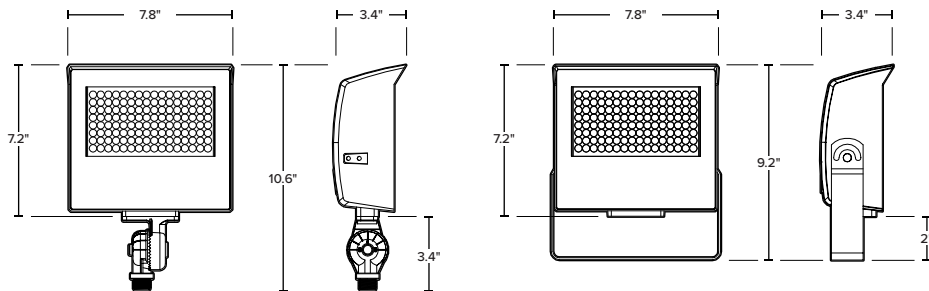


ESL-FLD-75150W-23050-BZ

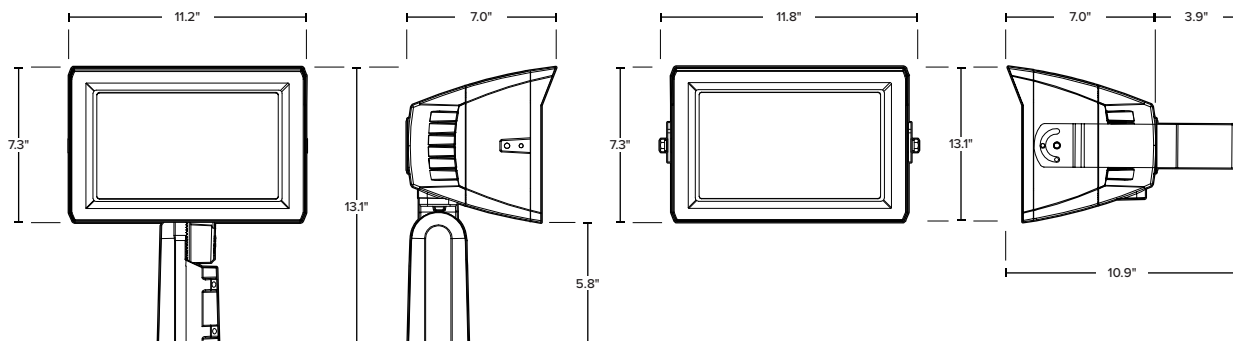


Dimensions:

ESL-FLD-200320W-23050-BZ

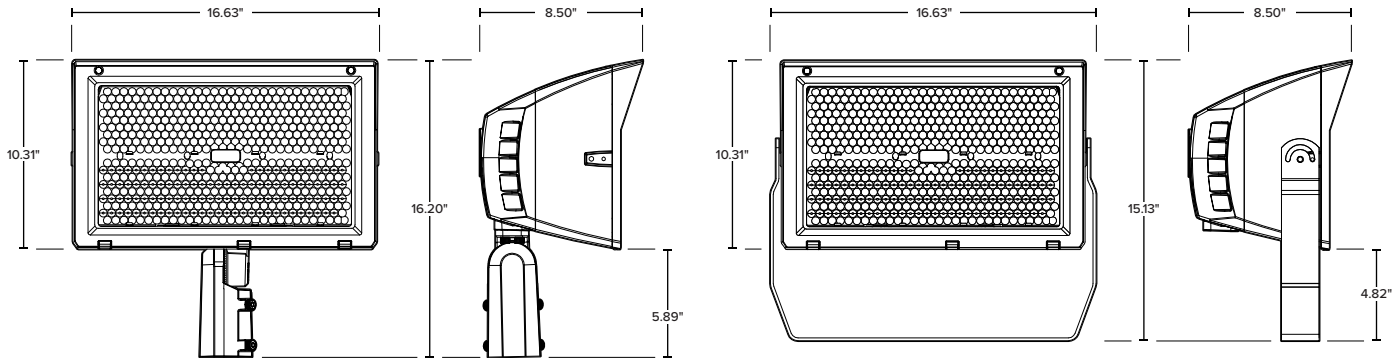


ESL-FLD-380500W-23050-BZ

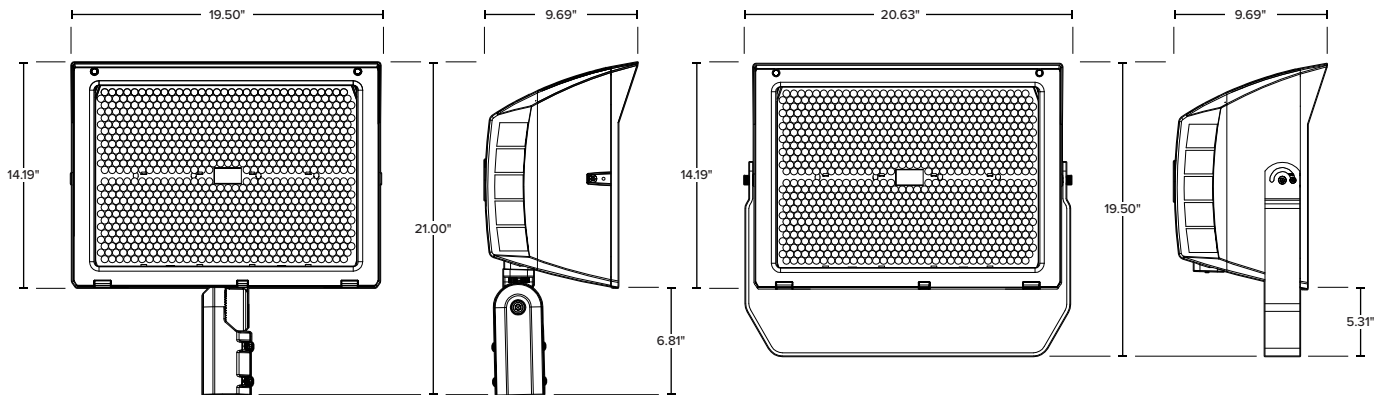


Mount Dimensions:

MOUNTS INCLUDED WITH ESL-FLD-1020W-23050-XX & ESL-FLD-3060W-23050-XX

Knuckle Mount




Trunnion Mount

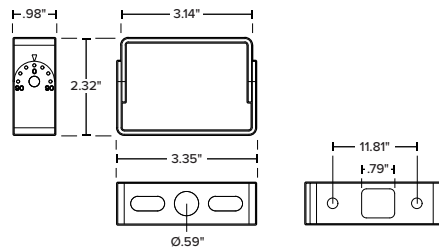


Mount Dimensions:

MOUNTS INCLUDED WITH ESL-FLD-75150W-23050-BZ

Slip Fitter Mount

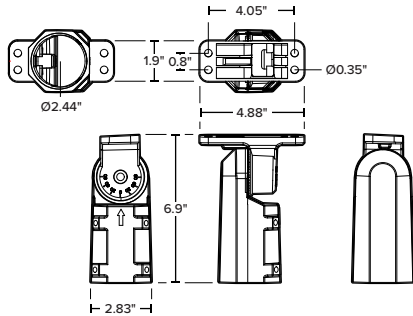


Yoke Mount




MOUNTS INCLUDED WITH ESL-FLD-75150W-23050-BZ

Slip Fitter Mount

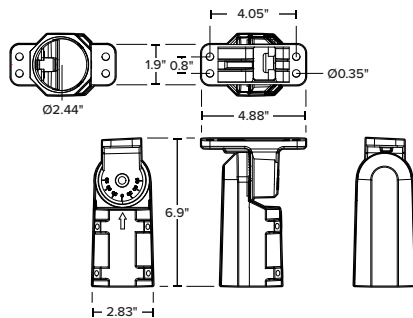


Yoke Mount



MOUNTS INCLUDED WITH ESL-FLD-75150W-23050-BZ

Slip Fitter Mount

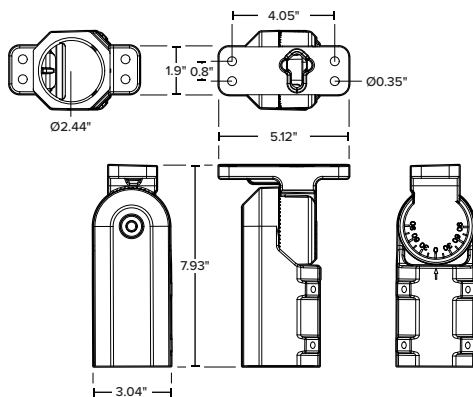

Yoke Mount

