# **DQC1** DRIVER

# 15 Watts - Single Output Driver

Date:

## Key Features & Benefits:

N

- Universal AC Input / Full Range (up to 305 VAC)
- Built-in Active PFC Function
- Protections: Short Circuit / Over Voltage / Over Temperature
- Suitable for Dry / Damp Locations
- Easy Installation with ESL Vision Quick Connect Series
- 7 Year Warranty



#### **Technical Specifications:**

#### Input

Input Voltage: 100 - 277 VAC Power Factor: 0.98 / 120 VAC, 0.90 / 277 VAC Total Harmonic Distortion: 20% Frequency Range: 47~63Hz Efficiency: 88% AC Current: .125 A / 125 VAC, .054 A / 277 VAC

# Output

DC Voltage: 36 VDC Rated Current: 350 mA Rated Power: 15W Voltage Range: 28 - 42 VDC Line Regulation: 3% Load Regulation: 2%

**Project:** 

Notes:

Catalog #:


# Environment

us

E

Working Temperature: -20 <sup>~</sup> 50°C Max Case Temperature: 65°C Working Humidity: 20 -70% RH

Driver Dimensions:

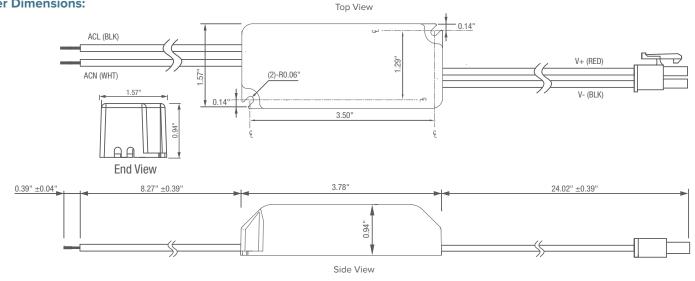

## Example Part Number: ESL-DQC1-15W-1L



Copyright © 2017 ESL Vision, LLC. All rights reserved. Rev: 09.13.17