30 Watts - Single Output Driver

PAGE 1 OF 1

Key Features & Benefits:

- Universal AC Input / Full Range (up to 305 VAC)
- Built-in Active PFC Function
- Protections: Short Circuit / Over Voltage / Over Temperature
- Suitable for Dry / Damp Locations
- Easy Installation with ESL Vision Quick Connect Series
- 7 Year Warranty



Project: Date: Catalog #: Notes:











Technical Specifications:

Input

Input Voltage: 100 - 277 VAC

Power Factor: 0.95 / 120 VAC, 0.90 / 277 VAC

Total Harmonic Distortion: 15% Frequency Range: 47~63Hz

Efficiency: 86%

AC Current: .250 A / 120 VAC, .108 A / 277VAC

Output

DC Voltage: 36 VDC Rated Current: 630 mA Rated Power: 30W


Voltage Range: 28 - 42 VDC

Line Regulation: 2% Load Regulation: 21%

Environment

Working Temperature: -20 ~ 40°C Max Case Temperature: 86°C Working Humidity: 20 -70% RH

Driver Dimensions:

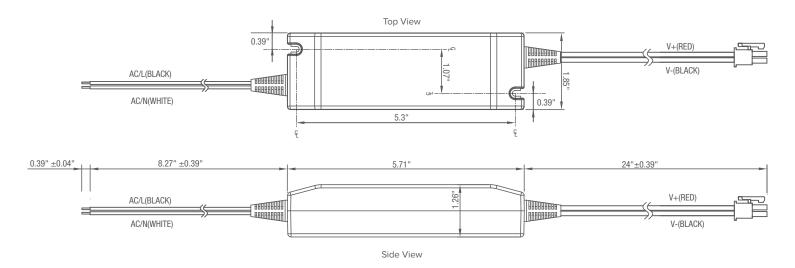

Example Part Number: ESL-DQC1-30W-1L



Copyright © 2017 ESL Vision, LLC. All rights reserved. Rev: 09.13.17

