





### ⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and **DO NOT** attempt repair unless you are a qualified technician or the customer service member.


### Surface Mounting

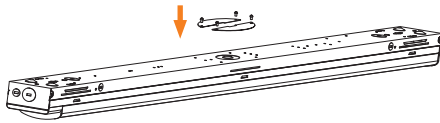


**1** Fix the baffle onto the back of the fixture with screws.




**2** Detach the LED assembly by starting at one end of the fixture and pressing each side of the base.

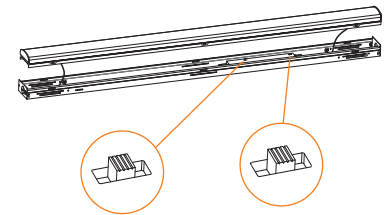


**3** Select your wattage and color temperature with the dip switches located on the driver.

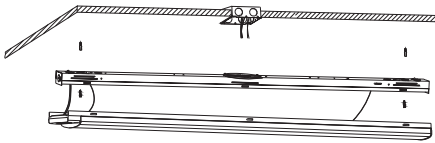

**4** Pull the AC and dimming wires through the outlet hole. Then attach the fixture to the ceiling with anchors and screws (not included).

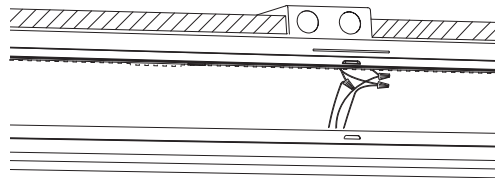


**5** Use appropriate UL approved wire connectors to complete wiring with the main power and dimming wires as shown in the Wiring Diagram.



**6** Push lamp upward and snap into place to complete installation.


### Sensor Installation

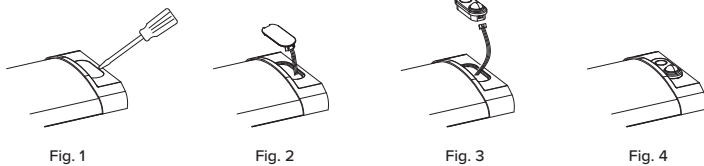

An approved sensor may be installed before or after fixture installation.

1. Remove the sensor plate.
2. Remove the flat cable from the back of the plate.
3. Insert the cable terminals into the approved sensor.
4. Snap the sensor into the fixture securely.


### Wiring Diagram

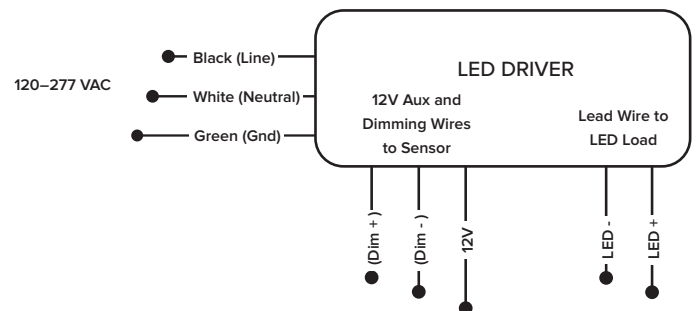


### Chain Kit Mounting




**1** Connect the V-hooks to the back of the fixture body.




**2** Attach chain to the V-hooks to hang the lamp.

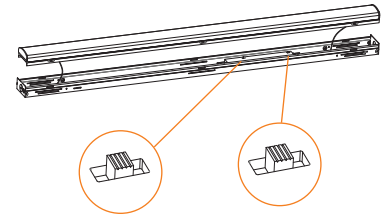

**3** Select your wattage and color temperature with the dip switches located on the driver.

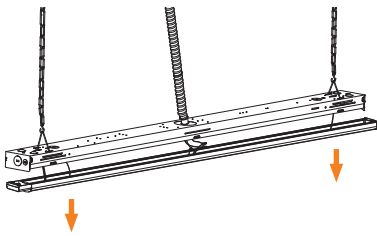


**4** Fix the end of the conduit to the outlet hole. Open the fixture body and connect the AC and dimming wires as shown in the Wiring Diagram.

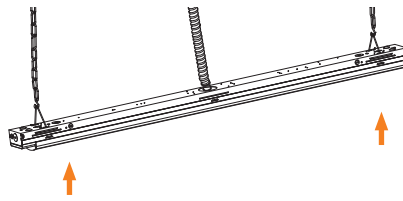


**5** Close the fixture body to complete the installation.


### Cable Kit Mounting




**1** Attach the V-hooks to the cables.




**2** Attach the V-hooks to the fixture body to hang the lamp.

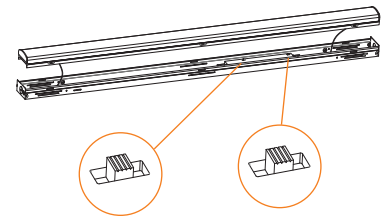

**3** Select your wattage and color temperature with the dip switches located on the driver.

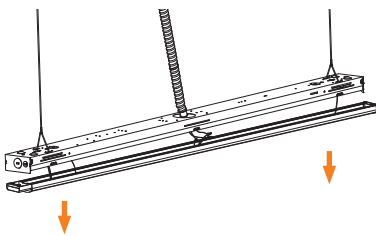

**4** Fix the end of the conduit to the outlet hole. Open the fixture body and connect the AC and dimming wires as shown in the Wiring Diagram.

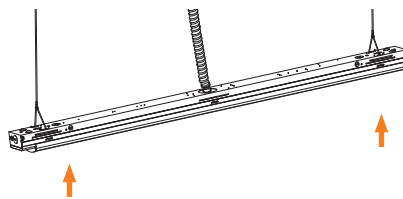

**5** Close the fixture body to complete the installation.