

Key Features & Benefits:

- Housing:
 - Strip fixture dimensions (96" x 4.25" x 2")
 - Die-formed and embossed code 22 gauge steel
 - Finish is high reflectance baked white enamel
- Gear Trey:
 - Flat heavy gauge die-formed code grade steel for all components
 - Easy Access for quick installation
- 3/4" Knockouts on Both Ends

Project: _____ Date: _____

Catalog #: _____

Notes: _____



Electrical Data:

Light Specifications:

Lumen Output: Up to 7,500 Lumens
 Efficacy (lm/W): Up to 125 Lumens per Watt
 Kelvin: 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >82
 Rated Life: >50,000 Hours

Driver Data:

Input Voltage: 120-277 VAC
 Input Power: 60W
 Input Current @ 120V: 0.5 Amps
 Input Current @ 240V: 0.25 Amps
 Input Current @ 277V: 0.217 Amps
 Total Harmonic Distortion (THD): <10%
 Power Factor: >0.99
 Operating Temperature: -4 ~ 122°F

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
ESL-ID-WBS8-S-60W-F35	60W	7,260	121	3500K
ESL-ID-WBS8-S-60W-F40	60W	7,380	123	4000K
ESL-ID-WBS8-S-60W-F50	60W	7,500	125	5000K

Ordering Guide:



ESL	-	ID	-	WBS8	-	S	-	60W	-	F	-	
ESL		TYPE		SERIES		CLASS		WATTS		LENS		KELVIN
		ID Series		WBS8 (Wide Body)		S		60W (60 Watts)		F (Frosted)		35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)
												OPTIONS

Example Part Number: ESL-ID-WBS8-S-60W-F35

Options (Add as Suffix):

- **Sensors:**
 - ESL-4OCC (Occupancy Sensor, On/Off, 8'-20' Mounting)
 - ESL-REM-101 (Hand Held Remote to Program ESL-4OCC)


Dimensions:

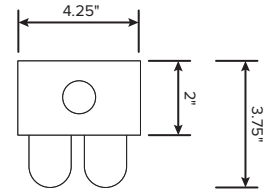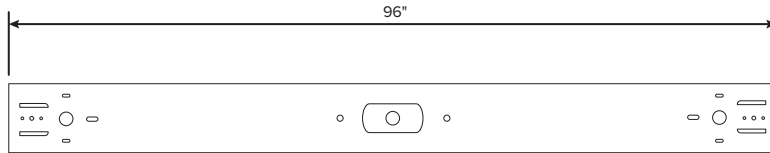

WIDE BODY STRIP SERIES

2 FOOT TWO LAMP BODY	SERIES	PART NUMBER	WATTS	(lm/W)*	LUMENS*
	ID WBS2	ESL-ID-WBS2-S-20W-FXX	20	141	2,820
4 FOOT TWO LAMP BODY	SERIES	PART NUMBER	WATTS	(lm/W)*	LUMENS*
	ID WBS4	ESL-ID-WBS4-S-30W-FXX	30	141	4,230
8 FOOT TWO LAMP BODY	SERIES	PART NUMBER	WATTS	(lm/W)*	LUMENS*
	ID WBS8	ESL-ID-WBS8-S-60W-FXX	60	141	8,460

KEY: XX = 35, 40, or 50 for kelvin temperature
 *At 5000K. See spec sheets for other kelvins

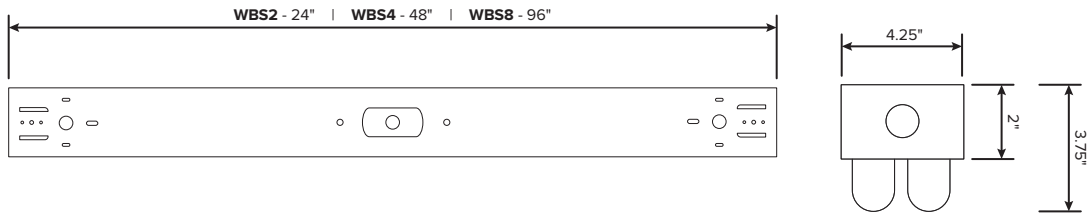

NARROW BODY STRIP SERIES

4 FOOT SINGLE LAMP BODY	SERIES	PART NUMBER	WATTS	(lm/W)*	LUMENS*
	ID NBS4	ESL-ID-NBS4-S-15W-FXX	15	141	2,115

KEY: XX = 35, 40, or 50 for kelvin temperature
 *At 5000K. See spec sheets for other kelvins

