

Page 1 of 2

Project:	Date:
Catalog #:	
Notes:	

Illumination:

• Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical:

- Dual 120/277 voltage.
- · Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- · 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- · Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- · Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- · EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing:

- · Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.
- · Compact, low-profile design.

Options:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- · 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- · Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.




Warranty / Listing:

Five year warranty on all electronics and housing. Battery prorated for five years.

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for damp locations (0°C -50°C). Certified to CEC under Title 20 Regulations.

Dimensions:

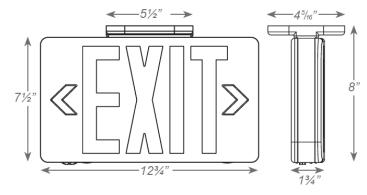





Catalog Data:

Sample Part Number: EZXTEU2RWEM

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

¹ Available only with EM units.

² Available only with AC units.

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY		OPTIONS	
EZXTEU	2	Universal Single/	R	Red	W	White	(blank)	AC-Only	SDT	Self-Diagnostics ¹
		Double Face	G	Green	В	Black	EM	Battery Backup	2C	Dual Circuit Operation ²
									Custom	Custom Wording
									USA	Assembled In USA
							l			

Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2021 ESL Vision, LLC. All rights reserved. Rev: 09/23/21



Page 2 of 2

Project:	Date:
Catalog #:	
Notes:	

Electrical Information:

CATALOG NUMBER	INPUT V	VATTS (W)	INPUT AMPS (A)		
	120V	277V	120V	277V	
EZXTEU-RED/GREEN/EM/2C/SDT	3.8	3.8	0.034	0.020	