

Key Features & Benefits:

- Up to 133 Lumens per Watt
- Glass Construction with Shatterproof Coating
- > 220° Beam Spread
- Double Ended or Single Ended Wiring
- Integral Driver (Isolated)



Project: _____ Date: _____
 Catalog #: _____
 Notes: _____




Technical Specifications:


Power: 10 Watts
 Input Voltage: 120-277 VAC
 Lumen Output: Up to 1,383 Lumens
 Efficacy (lm/W): Up to 133 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >80
 Material: Glass with PET Coating
 Power Factor: >0.9
 Rated Life (hrs): 50,000 Hours
 Base Type: G13
 Operating Temperature: -4°F ~ 113°F (-20°C ~ 45°C)
 Tube Dimensions (ØxL): 1" x 23.74"
 Tube Weight (lbs): 0.25 Pounds

GLV Wire Diagrams (Type B):

Before Upgrade:

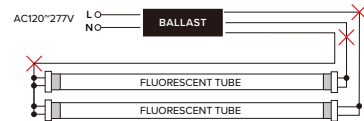

After Upgrade:

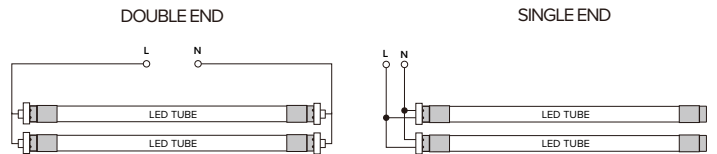

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
ESL-T8-GLV2-10W-F130	10W	1,352	130	3000K	P52SKQDA
ESL-T8-GLV2-10W-F135*	10W	1,362	131	3500K	PQ9SZU76
ESL-T8-GLV2-10W-F140*	10W	1,362	131	4000K	PWFD8R81
ESL-T8-GLV2-10W-F150*	10W	1,383	133	5000K	PUX5VQKN

*QUICK SHIP ITEMS

Ordering Guide:

Example Part Number: **ESL-T8-GLV2-10W-F135**

ESL	-	T8	-	GLV2	-	10W	-	F	1	
ESL		T8		TYPE		WATTS		LENS	GENERATION	KELVIN
		T8 Tube		Glass Line Voltage (2ft)		10W (10 Watts)		F (Frosted)	1 (1st Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)