

# LED Wall Pack - 90W

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_

**The ESL Vision Wall Pack series** features classic design with immense energy saving benefits. Rugged die-cast aluminum housing coupled with thermally optimized long-life LEDs protected by a wet location rating ensures a life expectancy of over 15 years. Switching your businesses' outdoor lighting to ESL Vision's Wall Packs will not only cut your energy expenses by up to 75%, it'll also save you on those costly facility maintenance visits.

## Key Features & Benefits

- Rugged die-cast aluminum housing:
  - Dark bronze polyester powder coat finish
- Optical grade polycarbonate lens:
  - UV stabilized
  - Molded prismatic for optimal uniformity
  - Impact resistant
- Continuous gasket for weather-tight seal
- LEDs mounted to and protected by aluminum housing with easy driver access hinged door
- Environmentally friendly:
  - No mercury
  - No hazardous substances
  - Super low energy consumption
- Suitable for wet locations
- (3) 3/4" Threaded knockouts
  - (1) On bottom
  - (1) On either side
- 10 Year limited warranty
- Mounting options:
  - Direct to electrical box
  - Flush wall mount
- Comes standard with full cutoff IESNA compliant reflector



ESL Vision Part#

ESL-WP-90W-140

ESL-WP-90W-150


DLC Listed QPL Code

PRRXCMCA

PNRRSKVD



Wall Pack

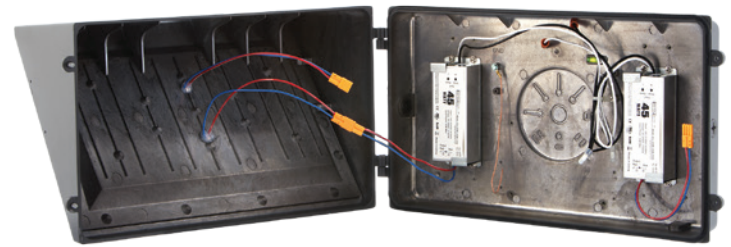

Integrated Design



Back View



## Technical Data

### Driver Specifications

Input Power: 90 Watts

Input Voltage: 120-277 VAC

Input Current @ 120V: 0.75 Amps

Input Current @ 277V: 0.325 Amps

Total Harmonic Distortion (THD):

THD @ 120V: 16%

THD @ 277V: 21%

### Light Specifications

Lumen Output: Up to 7,785 Lumens

Efficacy (lm/W): Up to 87 Lumens

Correlated Color Temperature (CCT): 4000K, 5000K

Color Rendering Index (CRI): >80


Beam Angle: 83-110°

Lens Type: Polycarbonate


Photocell Compatible: YES

L70 Lifetime: >50,000 Hours

## Wall Pack Dimensions

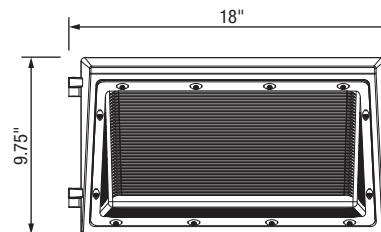

Front



Side

## Dimensions and Weights

Dimensions (LxWxD): 9.75 x 18 x 8.72

Weight (lbs): 14.33

## Wall Pack Ordering Guide

Example Part Number: **ESL-WP-90W-140**

ESL	-	WP	-	90W	-	1	
ESL	-	WP	-	Watts	-	Generation	Color
		WP (Wall Pack)		90W (90 Watts)		1 (Generation 1)	40 (4000 Kelvin) 50 (5000 Kelvin)